UnattendedPayments from ADVAM - changing the way consumers make self-service payments



With consumers increasingly preferring a more convenient way to pay, particularly on lower value, instant purchases, it's time to consider switching to UnattendedPayments from ADVAM.





ADVAM UnattendedPayments Solutions



The core is technology, the key is expertise

Our range of payment terminals for parking and self-service industries enable our clients to eliminate the burden of cash handling, increase operational efficiency, reduce cost of vandalism and increase revenue.

Our Non-CVM range allows easy and secure integration of contactless payment into parking and self-service businesses.



Multi-machine or single machine integration ready solutions

Trusted by businesses. Used by major airports, shopping centers and parking operators all over the world

Every day, ADVAM delivers world leading payment solutions, processing millions of transactions through our ADVAM Gateway for our clients and their customers – reliably, efficiently and securely.

Support features

- Remote software updates
- PCI compliance updates
- Equipment monitoring
- 24/7 telephone support
- Account management

Administration portal

Functionalities

- Cloud-based access
- Manage and refund transactions

Reporting

- Detailed and summary reports
- Access to custom reports
- Billing reconciliation reports

Ability to search for transactions by:

- Reference
- Credit card
- Receipt
- Date

Scheme certifications

- Visa (credit/debit)
- Mastercard (credit/debit)
- American Express
- Diners
- Discover
- JCB

Mobile wallets

- Apple Pay
- Samsung Pay
- Google Pay



Non-CVM payment terminals

Payment terminal iUC285 iUC150B technical specifications iUR255 iUC280 iUl120 Payment method Contactless 0 n/a NFC n/a 0 EMV chip 0 n/a Magstripe n/a $Integration \ APIs \\$ ADVAM serial n/a n/a n/a • Pulse n/a n/a n/a 0 **MDB** n/a n/a n/a 0 Protection IP34 IP65 IP54 IP54 Ingress protection n/a Shock protection IK10 IK10 IK10 IK10 n/a Compliance PCI PTS certification 4.x 4.x 4.x ready 4.x n/a EMV compliant n/a ISO 14001 Environmental standards ISO 14001 ISO 14001 ISO 14001 ISO 14001 **Technical** Communication Ethernet n/a n/a n/a n/a 4G compatible n/a n/a n/a n/a RS232 n/a n/a n/a • MDB n/a n/a n/a n/a Powered USB n/a n/a n/a n/a General Size in mm (w x h x d)108 x 73 x 148 85 x 107 x 60 120 x 134 x 62 73 x 61 x 23 85 x 110 x 60 Cut-out in mm (w x h) 74 x 62 73 x 61 107 x 85 85 x 107 Weight (g) 700 87 270 270 620 No display No display Colour backlit Colour backlit Display n/a - 4°F to 149°F Operating/Storage temperature Relative humidity, 85% HR at +131°F 85% HR at +131°F 90% HR at +131°F 90% HR at +131°F 90% HR at +131°F non condensing

Card readers

Controller

Specifications subject to change without notice.

Product configurations and bank certifications

Product configurations



iUC285 Standalone contactless, swipe and insert card reader



iUC150BContactless card reader



iUR255Contact insert card reader



iUl120 Controller




Standalone contactless, swipe and insert card reader



i**Ul120** Controller

Bank certification	iUC285	iUC150B+iUR255+iUl120	iUC280+iUl120
Chase Bank	•	•	•
Bank of America	0	•	0



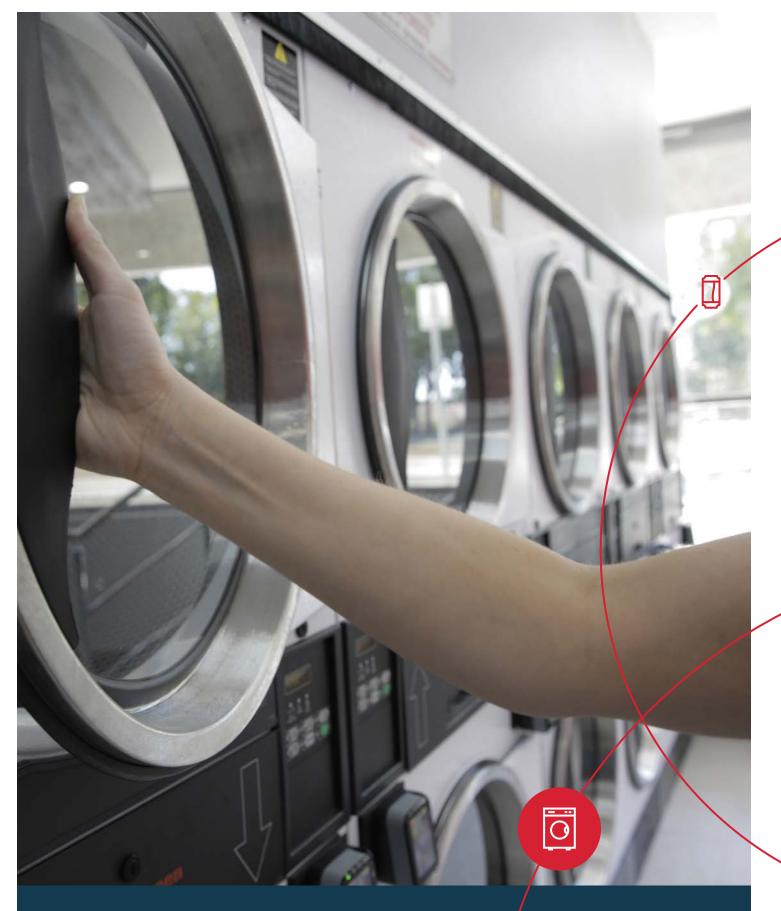

sales-us@advam.com | +1 703 592 1251

advam.com